



Key Features

- ADA and TAS compliant
- Serves one to three users at a time
- Standard lavatory spacing on 30" centers
- Elongated basin is constructed of Evero® natural quartz surface
- Available in a variety of colors
- Compatible with Verge[™] deck-mounted soap dispensers and faucets

Specifications

Accommodates one to three users. The units handle washroom traffic quickly and economically, while providing each user with personal space. The Verge® Wash Basin is designed with standard lavatory spacing positioned on 30" centers.

Complies with • ADA

• ICC/ANSI 117.1

• NSF/ANSI 372

• TAS

Product Compliance

Listed by IAPMO R&T to

- Uniform Plumbing Code (UPC)
- National Plumbing Code of Canada
- International Plumbing Code (IPC)
- IGC 156 and the requirements of CSA B45.5/IAPMO Z124 and ASME A112.18.1/CSA B125.1



Listed by UL Environment to

GreenGuard Gold



Sustainability

• Evero Classic participates in the mindful MATERIALS library





Finishes

Click on any color swatch to view as a larger image.





*PVD Finishes, see PVD Finishes section.

* PVD Finishes

Physical Vapor Deposition is an intricate, environmentally friendly finishing process that molecularly bonds the finish to the faucet, creating a very hard, durable surface that will not corrode, discolor, or tarnish.

Compatible Bradley Products

Verge Deck-Mounted Soap Dispensers and Faucets



Serves the American Disabilities Act and ICC/ANSI 117.1 guidelines, citations 306, 308, 309.4, 606.4, 606.5 when installed according to these requirements. Consult local codes and standards.



This plumbing fixture is designed for hand washing only. It is not intended to dispense water for human consumption through drinking or for preparation of food or beverages.

For more information on Evero Natural Quartz Surface, faucets, valves, transformers, $\,$ and the soap dispensers, please visit bradleycorp.com.

Protected by one or more of the following U.S. Patents: D625,792 S; D633,992 S; and D642,664 S.

Page 1 of 6 2/21/2024
This information is subject to change without notice.
Bradley_Sink_Verge_LVRD3

View Latest Version

© 2024 Bradley
P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com



Construction

Basin

<u>Evero Classic – Geo Series</u> is a polished natural quartz surface made from a blend of bio-based resin, natural quartz, granite, and other exotic minerals.

<u>Evero Classic – Pearl Series</u> is a polished natural quartz surface made of bio-based resin, sea shells, and natural quartz.



Variations in the natural stone color, pattern, size, shape, and shade are inherent. Due to these unique characteristics, please expect subtle shade variations when units are installed adjacent to each other.

Access Panel

Panel is composed of decorative 300 series stainless steel.

Support Frame

Basin assembly and access panel are secured to a heavy-gauge stainless steel support frame mounted to wall.

Vandal Resistance

Water supplies, valves, waste assembly, and other optional items are concealed within the access panel/frame.

Faucet Options

Choose from our 0.35 gpm (1.30 Lpm) or 0.50 gpm (1.90 Lpm) Verge Faucet — Crestt, Metro, Linea, and Zen Series. 4" Centerset and Centershank faucet hole drillings are available for faucets by others. Optional 4" centerset trim plates are available for additional vandal resistance.

Soap Dispensers

Choose from our Verge Deck-Mounted Soap Dispensers — Crestt, Metro, Linea, or Zen Series. Soap drillings available for soap by others.

Accessibility

| Accessibility Code | Rim Height (maximum) | Notes |
|-------------------------|-------------------------|---|
| ADA | 33½" (851) | At least one basin must meet dimensional requirements and have proper reach, knee, and toe clearance. |
| ADA/JUV Juvenile ADA | 30½" (775) | At least one basin must meet dimensional requirements and have proper reach, knee, and toe clearance. |







| Models (Must select one) | | | | Faucet Finish Type 1 (select one) | |
|--|---|--------------------------------|-------------------------|--|--|
| Model | Description | | | ○ PC | Polished Chrome |
| ○ LVRD3 | Verge Wash Basin – LV | RD-Series, Three-Station | | ○ ВВ | Brushed Black Stainless |
| Standard Sel | lections (Must sel | ect one from each categ | iory) | ○ BS | Brushed Stainless |
| Material Type (sel | lect one) | | | ○ BZ | Brushed Bronze |
| _ | Classic – Polished Finish | | | ○ BR | Brushed Brass |
| Color of Evero® B | Bowl (select one) | | | O BN | Brushed Nickel |
| NOTE: Click on any s | watch to view as a larg | er image. | | - | r will always have a stainless steel finish. |
| Evero Classic - Geo Sei | ries | | | | Supply (select one) |
| O ANDORRA | Andorra | ○ MOJAVE | Mojave | 1 _ | AC Power 13 |
| O ANTARCTICA | Antarctica | MYKONOS | Mykonos | 1 ~ | Battery 1 – 4x AA alkaline batteries included per faucet |
| O ARUBA | Aruba | O PATAGONIA | Patagonia | | No Power Supply ² |
| O BLACK-SEA | Black Sea | RAINIER | Rainier | | ser Type (select one) |
| O DENALI | Denali | O SIENA | Siena | O 6-3100 O 6-3300 | Verge Deck-Mounted Soap Dispenser – Crestt Series ¹ Verge Deck-Mounted Soap Dispenser – Metro Series ¹ |
| GLACIER | Glacier Bay | SIERRA | Sierra Madre | O 6-3500 | Verge Deck-Mounted Soap Dispenser – Linea Series ¹ |
| O KALAHARI | | O YUKON | | O 6-3700 | Verge Deck-Mounted Soap Dispenser – Zen Series ¹ |
| CKALAHARI | Kalahari | O YUKUN | Yukon | ○ SDO | 1-3/8" Soap Drilling Only |
| _ | eries (available at an addi | _ | | O NSD | No Soap Dispenser/No Drilling |
| O AKOYA | Akoya | O BLACK-MOON | Black Moon | | on Type (select one) |
| Faucet Type (selec | | | | O R | Touch-Free Activation ⁴ No Activation ⁵ |
| S53-3100 S53-3300 | Verge Faucet – Crestt S Verge Faucet – Metro S | | | Soap Type (se | |
| S53-3500 S53-3500 | Verge Faucet – Linea S | | | O F | Foam Soap |
| S53-3700 Verge Faucet – Zen Series | | | | ŏi | Liquid Soap |
| S53-3100-P Verge Faucet – Crestt Series, Includes Trim Plate 6 | | | | Soap Fill System 4 (select one) | |
| ○ S53-3300-P ○ S53-3500-P | , | | От | Single (top fill at spout) | |
| ○ S53-3700-P | , | | ○ M | Multi-Feed (shared tank, includes 6-SOAP-MFT Multi-Feed Soap | |
| O 4" Set | 4" Set 4" Centerset (11/4" Drilling Only) | | | Coon Diamona | Tank Assembly |
| SHANK Centershank (11/4" Drilling Only) NFD No Faucet Drilling | | | | ser Finish Type 4 (select one) | |
| Faucet Activation Type (select one) | | | | O PC | Polished Chrome |
| ○ R | Touch-Free Activation 1 | | | O BB | Brushed Black Stainless |
| No None No Activation 2 | | | | O BS | Brushed Stainless |
| Water Supply Type | (select one) | | | O BZ | Brushed Bronze |
| Thermostatic Mixing Assembly (supply hoses and shut-offs included) | | | shut-offs included) | ○ BR | Brushed Brass |
| O L Single Tempered Line Assembly (supply hoses and shuf-offs included) | | | shuf-offs included) | O BN | Brushed Nickel |
| Flow Control Type 1 (select one) | | Soap Power Supply (select one) | | | |
| O 3 0.35 gpm (1.30 Lpm) Silicone Tip, Multiple Individual Laminar Flow Streams | | O AC | AC Power ^{3 4} | | |
| 5 0.50 gpm (1.90 Lpm) Silicone Tip, Multiple Individual Laminar Flow Streams | | | Laminar Flow Streams | O BA | Battery – 4x D-cell batteries included per dispenser ⁴ No Power Supply ⁵ |
| Available with Verge faucet selection only. Available with faucet drilling only. | | | | | Type (select one) |
| 3 AC power supply will include either individual AC plug-in adapter or 4-way AC splitter assembly | | | | O STAIN | Stainless Steel |
| depending on configuration. Refer to the Verge Soap and Faucet Power Supply chart on page 2 for to learn what power supply the configurator will pull in. | | | рріу спаті оп раде 2 | Waste Assembly Type (select one) | |
| Available with Verge soap dispenser selection only. Available with each dispenser drilling only. | | | | S-POLY | Single Polypropylene P-Trap |
| Available with soap dispenser drilling only. Trim plate finish will match Faucet Finish for PC, BB & BS. All other faucet finishes will receive | | | nishes will receive | S-CHROME | Single Chrome-Plated P-Trap |
| a PC trim plate. | | | | | © 2024 Bradle |

© 2024 Bradley


Page 3 of 6 2/21/2024 This information is subject to change without notice. Bradley_Sink_Verge_LVRD3

View Latest Version




Dimensions for LVRD3 Verge Wash Basin


(mm)



Top View

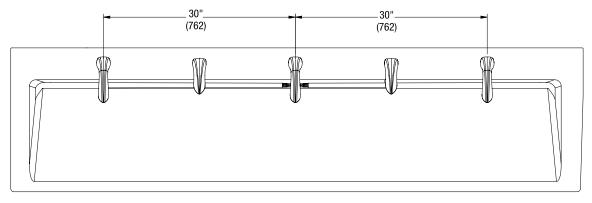

Front View

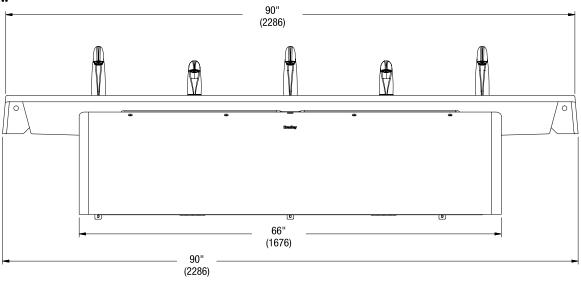


Page 4 of 6 2/21/2024
This information is subject to change without notice.
Bradley_Sink_Verge_LVRD3

View Latest Version

© 2024 Bradley
P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com

Dimensions for LVRD3 Verge Wash Basin

(mm)

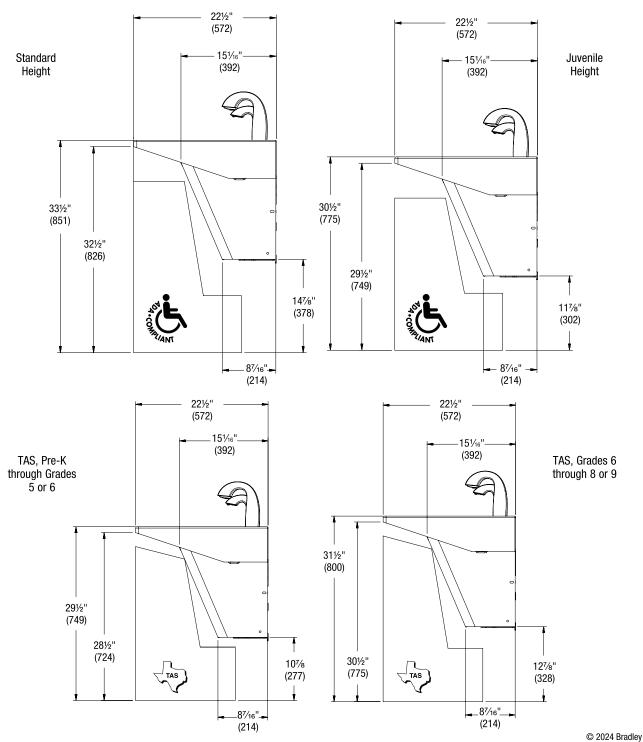

Page 5 of 6 2/21/2024
This information is subject to change without notice.
Bradley_Sink_Verge_LVRD3


View Latest Version

P.O. Box 309, Menomonee Falls, WI 53052-0309 800 BRADLEY (800 272 3539) +1 262 251 6000 bradleycorp.com




Rough-Ins for LVRD3 Verge Wash Basin

(mm)



Areas marked with a crosshatch require sufficient backing compliant with local building codes.

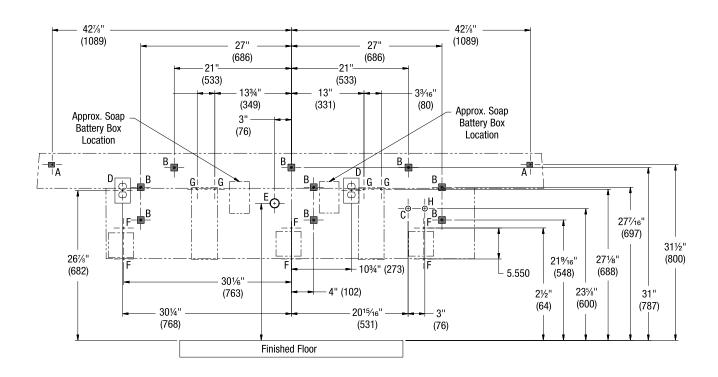

| CODE | DESCRIPTION | QTY. |
|------|---|------|
| А | 3/6" Lav Deck Bowl Anchors with a Minimum Pull-Out Force of 1,000 lb (reinforce walls at anchor points) | 2 |
| В | %" Lav Deck Frame Anchors with a Minimum Pull-Out Force of 1,000 lb (reinforce walls at anchor points) | 9 |
| H, C | ½" Hot/Cold Supplies, Stub-Out 2" From Wall | 1 |
| D | 110V GFI Protected Electrical Outlet (AC faucet and soap only) | 3 |
| Е | 1½" NPT Drain, Stub-Out 2" from Wall | 1 |
| F | #10 Anchors for Faucet Control Box Installation | 6 |
| G | #10 Anchors for Soap Tank Installation | 4 |

| RIM HEIGHT | VERTICAL HEIGHT ADJUSTMENTS FOR CODES A—E and H | FIXTURE STYLE |
|------------|---|----------------------------------|
| 33½" | None | Standard Height |
| 31½" | Subtract 2" | TAS, Grades 6 through 8 or 9 |
| 29½" | Subtract 4" | TAS, Pre-K through Grades 5 or 6 |
| 30½" | Subtract 3" | Juvenile Height |